



Dynamic Hand Recognition for Indonesian Sign Language (SIBI) using Leap Motion Control base on Euclidean Distance and Naïve Bayes Classifier

Ridwang, Syafaruddin, Amil Ahmad Ilham and Ingrid Nurtanio

EasyChair preprints are intended for rapid dissemination of research results and are integrated with the rest of EasyChair.

February 25, 2019

Dynamic Hand Recognition for Indonesian Sign Language (SIBI) using Leap Motion Control base on Euclidean Distance and Naïve Bayes Classifier

Ridwang^{2,3}, Syafaruddin^{2,4}, Amil Ahmad Ilham^{1,5}, Ingrid Nurtanio^{2,6}

¹Department of Informatics, Hasanuddin University, Makassar, Indonesia

²Department of Electrical Engineering, Hasanuddin University Makassar, Indonesia

³ridwan@uin-alauddin.ac.id, ⁴syafaruddin@unhas.ac.id, ⁵amil@unhas.ac.id,

⁶ingrid@unhas.ac.id

Abstract - Most deaf children are born into hearing families and the majority do not begin their Sign Language learning before age 3-6 in school. As children learning Sign Language from infancy show higher language proficiency than those who do not, it underlines the importance of hearing parents learning how to sign. The research method in naïve bayes algorithm, in order to classify 26 alphabet letter of Indonesian sign language including letter J and Z which using gesture for describe it. The Leap Motion controller is a consumer gesture sensor aimed to augment a user's interactive experience with their computer. It use for derive feature data from the deaf children gesture recording to set data in application. The accuracy level of the test result reached 96%.

Keyword : Dynamic Hand Recognition, Indonesian Sign Language, Naïve Bayes, Leap Motion Control, Gaussian Naïve Bayes, Euclidean Distance.

1. Introduction

Persons with disabilities are groups of limitation persons that can hinder their participation in community. Communities that live with limitations are divided into three, namely physical, mental, and both (physical and mental). Examples of physical limitations include blindness, hearing impairment, speech impairment, disability, and other physical limitations.

At present there are a lot of deaf people. In Indonesia, from the Central Bureau of Statistics (BPS) in 2010, there are 3,024,271 million people (the total population in 2010 was 191,709,144 million) experiencing hearing and speech impairment [1].

Based on the results of interviews with several members of the Indonesian Deaf Welfare Movement DPC GERKATIN Makassar, one of the most important things to help with the daily activities of deaf-speech people is to communicate with normal people. Difficulty in communicating will affect the lives and interpersonal relationships in the deaf-mute community. Difficulty in communicating between deaf-mute sufferers and normal people can bring problems in the process of integrating deaf-speech sufferers into the wider community [2].

The sign language used for each country may be different. In Indonesia admit two sign language, the official sign language system used in indonesia is the Sistem Isyarat Bahasa Indonesia (SIBI) where the system is similar to the sigh language applied in the United States, American Sign Language (ASL) and BISINDO used more sign language community in indonesia. In this study using the Sistem Isyarat Bahasa Indonesia (SIBI).

The previous study by Wibowo et al [3] recognize 24 alphabetic Indonesian letters in Indonesian sign language which resulted in average classification accuracy for Naïve Bayes is 95%. The introduction of J and Z letters cannot record from object because they using gesture for describe letter in Indonesian sign language (SIBI). Previous research using the Multilayer Perception (MLP) Neural Network (NN) method for the introduction of Arabic sign language resulted in an average accuracy of 88%. Then another research using Naive Bayes and Linear Discriminant Analysis (LDA) algorithm resulting in the accuracy of Naive Bayes that is better than LDA, but LDA shows faster time [4]. Marin et al. [5] investigated the performance of Leap Sensors Control by training SVM Classifier to recognize 10 different static mark with 1,400 sample counts capable of achieving an average accuracy of 80% as well as research focusing on challenges that include features for accurate signaling cues, and argues on how normalization to accommodate a reliable system for users with different hand sizes. Chen dkk menggunakan algoritma Hidden Markov Model (HMM) dan Support Vector Machine (SVM) untuk gerakan tangan dinamis. Chen et al.[6] use the algorithm Hidden Markov Model (HMM) and Support Vector Machine (SVM) for dynamic hand movements. Accuracy using the HMM algorithm is 90.56% and SVM is 98.24%. This study detect numbers and alphabets with a total of 36 movements captured by utilizing Leap Motion.

Based on those issue above, an automated system that is usefull as a translation from sign language into written language is needed. The research is based on Classifier Algoritihm and sensor Leap Motion Control (LMC), focused on the dynamic alphabet letters and words of Indonesian sign language (SIBI).

2. Material and Method

2.1. Leap Motion Control

Leap Motion is a small device basis of a USB device that can allow a computer user to control or play a computer using motion. In Figure 1, there are two monochromatic cameras with three infrared LEDs in Leap motion. Leap motion captures independent hand movements and finger movements, as well as objects such as pens. In fact, 200x Leap motion is more sensitive than free touch technology in existing products and technologies in 2014. Based on Leap motion has a high detection accuracy so it is widely developed as a controller and also motion recognition.

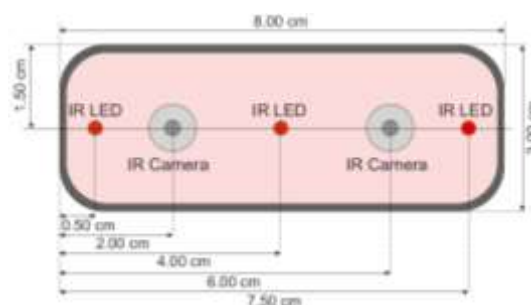


Figure 1. Leap Motion Control schematic

Leap Motion was developed by David Holz and Michael Buckwald. They developed a device similar to Microsoft Kinect but claimed to have a higher level of accuracy. The purposes of David Holz and Michael Buckwald are to replace the functions of the keyboard and mouse and allow users to explore the computer with just finger movements. The Leap Motion works by creating an interactive 4 cubic feet room that is able to detect fingers, hands and arm movements [7]. Data retrieval using Leap motion

utilizes API (Application Programming Interface) designed specifically for developers who want to utilize Leap motion [3].

The Leap Motion Sensor controller device accompanied by API support from its provider. Through API support, the hand and finger data can be sent to the person who created the program to use the sensor as an alternative computer interface tool. Table 1 lists the feature of the hand and fingers obtained from the APIs in this study. Feature of a normal palm (vector uni direction), and speed (in millimeters per second). The LMS API also handles behind-the-scenes image analysis, reducing complex extracting features task of developer from raw input data. This allows research to focus more on feature selection, not the extraction process. Below are accuracy result of applying machine learning to different signification classification [3].

Table 1. Features obtained from LMC API

		PALM		FINGERS	
		Name	Type	Name	Fingers
Hand Features*	Normal	Vector		Direction	Vector
	Position	Vector		Length	In mm
	Velocity	Vector in mm/sec		Tip Position	Vector
	Confidence	a float in [0,1]		Tip Velocity	Mm/sec
	Pinch Strength	a float in [0,1]		Dip Position	Vector
	Grab Strength	a float in [0,1]		Pip Position	Vector
	Sphere Center	Vector		Mcp Position	Vector
	Sphere radius	In mm			

2.2. Naïve Bayes Classifier

The Bayesian theorem provides a way to calculate the posterior probability based on assumed prior probabilities and the probability of different data object under given assumptions. Bayesian algorithm based on Bayesian theorem is a simple and commonly used classification algorithm which has rigorous mathematical theories as a basis. Assuming each attribute of the items to be classified is independent of each other, the constructed classification algorithm is naïve Bayes. The basic idea of naïve Bayes is: for a given item to be classified, calculate the probability of each category which the item belongs to, and the item will belong to the category with the largest probability [8].

The Bayesian classification approach is based on quantifying the trade-offs between various classification decisions using probability and the costs that accompany such decisions [9]. The classifier was developed based on Bayes probability rule which states:

$$P(Y|X_1, \dots, X_n) = \frac{P(X_1, \dots, X_n|Y)P(Y)}{P(X_1, \dots, X_n)} \quad (1)$$

This is the probability of obtaining Y given conditions X1 to Xn or the posterior probability of Y given a prior probability of Y and X1 to Xn likelihood. In our case, using the letters, this is interpreted as posterior probability of any letter given the likelihood parameter and a prior probability of that letter. The decision is taken based on the greatest of the calculated probabilities to achieve minimum error classification [9]. From the Bayes rule, the NBC is mathematically stated as:

$$P(X_1, \dots, X_n|Y) = \prod_{i=1}^n P(X_i|Y) \quad (2)$$

2.3. Euclidean Distance

Euclidean Distance is the classifier that is most often used to calculate the similarity of 2 vectors. If the distance between 2 images is large, then it can be concluded that the two images are not similar, whereas if the distance between two images is small, then the image is similar [10]. The equation of the euclidean distance is.

$$d_{ij} = \sqrt{\sum_{n=1}^k (x_{ik} - x_{jk})^2} \dots \dots \dots (3)$$

2.4. Feature Extraction

Leap motion produces sensor data in the form of the position of each hand and finger joint when there is a hand moving in the sensor capture room. These data are formed into a vector model which is then stored in the database as reference data. Each movement will be compared with this reference data to detect what the movement means.

In an initial attempt to create sign recognition software, using video analysis, the main challenge was not a feature that had to be put forward, but extraction itself. However, in the case of Leap Motion, the API provides a framework with a skeleton model for each hand, and reduces individual developers from heavy duty to analyze IR images to get relevant information [3].

Each hand object is built from the finger and the object of the palm, and each finger is formed by a set of bones. Each object has an appropriate 3-dimensional vector, referring to its direction and position in the euclidian space in the sensor display.

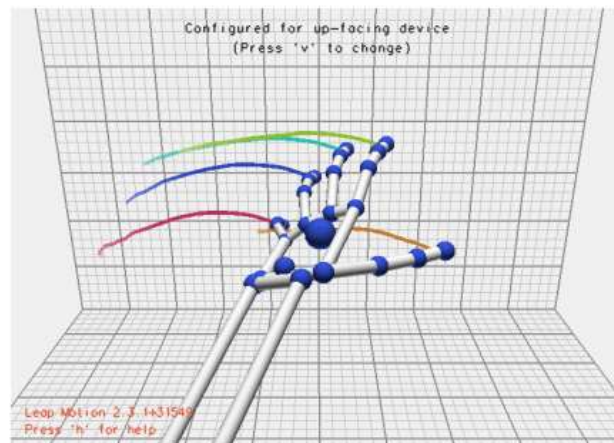


Figure 2. LMC Framework Model

Dynamic features are dynamic motion features or features obtained from LMC detection of the hands [11]. The good feature formation will increase accuracy in sign language recognition. The features used are Distal Tips Fingers, Palm Direction and Palm Position .

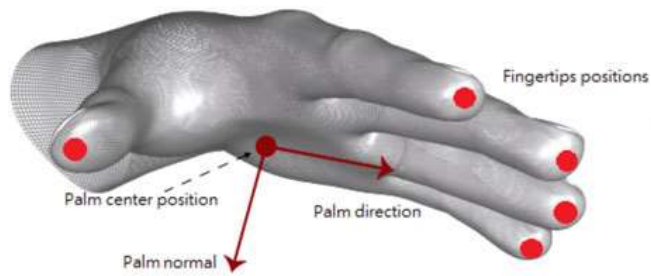


Figure 3. Hands Features

2.5. Data Acquisition

There are 26 letters of Indonesian sign language Alphabet (SIBI) used in this case static and dynamic as shown in figure 4. The total number of training uses totals 1300 samples derived from 50 samples for each letter class of 26 alphabet sourced from 5 different hand respondents where each respondent made 10 training data.



Figure 4. Sign Language Indonesia (SIBI) Alphabet

In this paper the initiate time of capture is based on leap motion first time frame capture and while leap motion capture hand gesture time. The tools used for this data capture were written with referencing to controller SDK using Python.

3. Desain System

System design consists of two main parts, namely the application of data training or builder and application of data testing. The training data application is used to record the user's hand movements without having to learn about programming languages first. Besides, it can be used to store data into a dataset and can extract data from datasets into vector shapes that will be used for classification processes.

The interpreter application is used as a user interface to learn sign language. The interpreter application is connected to Leap Motion Service running with the Leap Motion API.

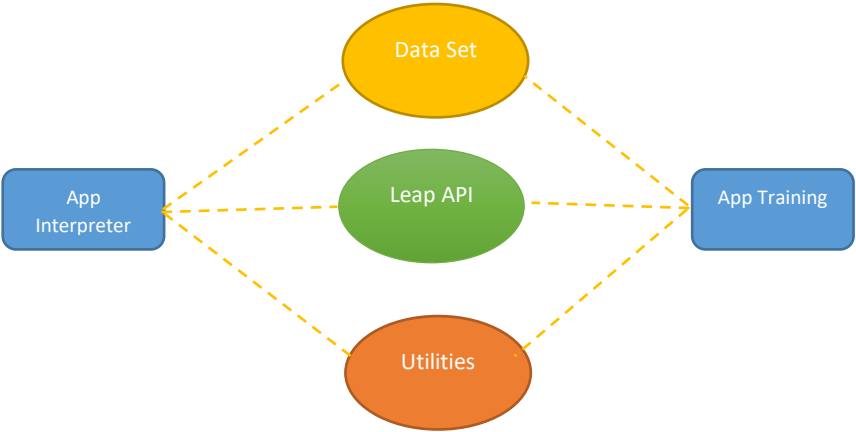


Figure 5. System Design

In the data training process, the vector data was obtained from the results of feature extraction by SDK Leap Motion and then data normalization was carried out on the three data items obtained from the reading of leap motion control namely Vector fingers, hand patterns or rolls and palms. Normalization of data on the fingers with the following formula :

$$Normalisasi = F_i - C \dots\dots\dots (4)$$

F_i is the coordinates of the fingers of each hand,
 C is the coordinates of the position of the palm.

In the extraction stage, the hand direction feature is only made to change the value to degrees because the data obtained from the API Leap Motion is a Radian value. The formulas used at this stage are:

$$deg = rad * 180/\pi \dots\dots\dots (5)$$

Whereas the process of test data is almost the same as the training data process, the difference lies in the last process where the training data process saves data to the dataset, while the test data process converts data from continuous data into discrete data using the Naïve Bayes Gaussian approach.

4. Classifier

This research used Naive Bayes for its basic classifier. This classifier was chosen due to its simplicity in technique and implementation. The basic principal of Naïve Bayes is assuming every feature in the feature-sets is not dependent each others. Its efficiency in using the data training, by using a small amount of data-set without reducing the accuracy of classification performance makes this classifier widely used on many gesture recognition researches [12].

Basically, Naive Bayes is a statistical approach with the probability formula as follows:

$$P((C_k|x)) = \frac{P(C_k)P(x|C_k)}{P(x)} \dots\dots\dots(6)$$

In order to naïve bayes the classifier can work at discrete values, one of which can assume a Gaussian distribution for each feature above all samples in the feature vector. So the probability of the feature x entering a class is

$$P(x|c) = \frac{1}{\sigma c \sqrt{2\pi}} e^{-\frac{(x-\mu c)^2}{2\sigma^2}} \dots\dots\dots(7)$$

Probability calculations often get a small number, and multiplying them together will risk losing precision. To overcome this, the logarithm of all three parts of the equation is taken, resulting in a formula

$$\log(P(c)) + \log\left(\frac{1}{\sigma\sqrt{2\pi}}\right) - \frac{(x-\mu)^2}{2\sigma^2} \dots\dots\dots(8)$$

Calculation of euclidean distance is used in samples of average values using formulas ;

$$d(p, q) = \sqrt{(q_1 - p_1)^2 + (q_2 - p_2)^2} \dots\dots\dots(9)$$

Simply classification of vectors based on the highest probability of all class probabilities :

$$\max_i(P(c_i) \sum_j^k P(x_j|c_i)) \dots\dots\dots(10)$$

5. Experiment and Result

Base on the stage shown in the system design, the system development as a result of this writing can be seen in figure 6 as app data training and figure 7 AppInterpreter, for the recognition of indonesian sign language pattern using leap Motion Control and Naïve Bayes.

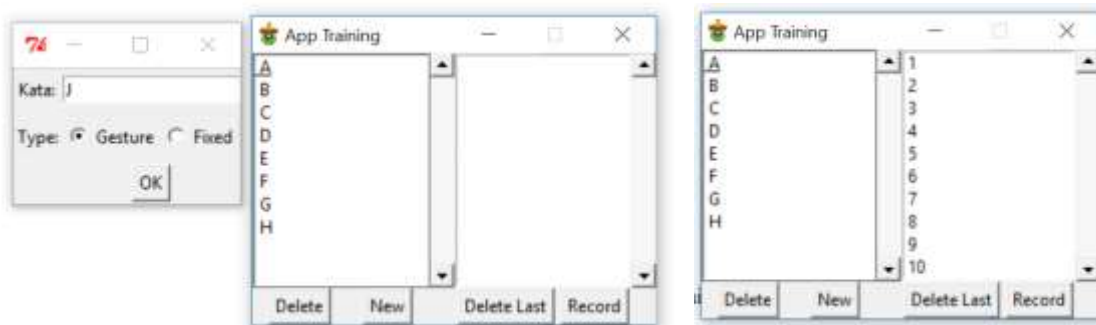


Figure 6. Result App Data Training

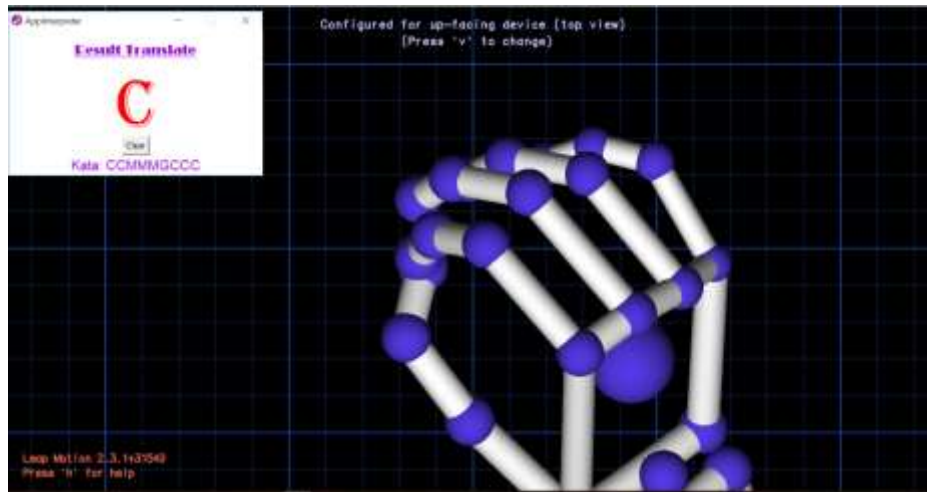


Figure 7. App Interpreter

5.1. Experiment

Using a tool titled as Tkinter (GUI of Python) for presenting and evaluating the classifier method base on model generated from feature-sets which is formatted on P file. Python already the default naïve bayes classifier as well, so that we just need import library from scikit.

The research tried to classify the gesture using gesture classification for leap motion, we classifying the 26 letters of indonesia sign language (SIBI) using the hand of the respondents. Through the testing proces with the loop count 6 times to test the 26 letters of SIBI alphabet consist of A, B, C, D, D, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, P, W, X, Y, Z. Total data set amounted 156 samples and the respondent's distance hand to the leap motion sensor device are 12 cm. this data classify using naïve bayes algorithm.

5.2. Result

Classification result showed on the table 2, where are letters known as another letter because pattern or gesture same other letter. For example, N recognized as M or N.

Table 2. Classification Result

Alphabet	Experiment		Known As other Letter
	True	False	
A	6	0	
B	6	0	
C	6	0	
D	6	0	
E	6	0	
F	6	0	
G	6	0	
H	6	0	
I	6	0	
J	4	2	I
K	6	0	
L	6	0	
M	6	0	

N	4	2	M,O
O	6	0	
P	6	0	
Q	6	0	
R	6	0	
S	6	0	
T	6	0	
U	6	0	
V	6	0	
W	6	0	
X	6	0	
Y	6	0	
Z	4	2	U,L

Table 3. Leap Motion Classification

Result Of	Samples	Percent
Correctly Classified Instance	150	96,16 %
Incorrect Classified Instance	6	3,84 %
Total Instance	156	

Feature extraction and data normalization for data testing from Leap Motion API same with training data processing. Testing data take from 17 frame with contain XYZ finger distal, pitch and roll coordinate. Classification result shown on the table 4 which data sorted from the highest probability to low probability. Beside determined from probability level, so determine from euclidean distance. If there are alphabet had highest probability value and the closest distance between training data with testing data then found the valid data.

Table 4. Probability count result of each class

Class	Probability	Euclidean
A	0.49829063002951625	0.12427167771365978
T	0.4964730754720572	0.6618753674332744
M	0.4964615506098093	0.9584814326190543
S	0.4964276936817576	0.4256425352416988
N	0.49626077181041944	1.0204044337833829
P	0.4946699394927318	1.4140232621574138
X	0.49443004115831723	0.597754565193763
Q	0.4938637754273052	1.5787214251343185
Y	0.49381156705336626	1.261124779865341
J	0.49377800601617323	1.461864793829387

O	0.4934157826912663	0.913767149405667
I	0.49287800601917325	1.0242695823042858
E	0.49177978614464	1.278849553767374
H	0.4911575131250296	1.350758627322214
Z	0.4910607418904194	1.121487434075456
C	0.49095721853010466	1.2303544651418814
G	0.4899545038668552	1.333429433914674
V	0.48961781454498543	0.8201949635276955
D	0.4890006075788114	0.5960133709134533
L	0.4885066079953518	1.094546589476957
R	0.48437733856275167	0.5770244486141277
W	0.4803115273695701	1.4605308147142804
U	0.47989742792023293	0.8555228250937538
K	0.47855049630856755	1.208564425582325
F	0.47749830469325505	1.1384021651862253
B	0.22240801991810477	1.4040570409006827

Based on table 4, probability values from A letter is great, and also have closest distance so that classification result of A letter is valid

5.3. Discussion

As shown on the table classification result above (table 2) there are letters recognized as another letter. For instance N recognized as M and O, Z recognized as U and L, J recognized I. The main problems from their shapes resembles the position coordinate and finger figure one to another on this study. For get training data, please do be carefully because can influence result of the data classification. As shown on the table Leap Motion Classification most of gesture and fixed classification generate above 96 %. During leap motion usage, it is frequently failed to recognize the hidden fingers considering its hardware limitation from sensor view. The mistake could occur because no match data from respondent with data from leap motion API. The real finger shown versus the finger are in the model API skeleton are different on the screen.

5.4. Conclusion

In this paper, Dynamic Hand Recognition for Indonesian Sign Language (SIBI) using Leap Motion Control approaches has been proposed Euclidean Distance and Naïve Bayes as a method for get the high accuracy. The experiment result, show increase accuracy until 96% with gesture and fixed hand. As the future work, it can combine two sensor for get more accuracy and combine more methods or algorithm.

REFERENCES

- [1] Sensus Penduduk, "Penduduk Menurut Wilayah dan Tingkat Kesulitan Mendengar," 2010. [Online]. Available: <http://sp2010.bps.go.id/index.php/site/tabel?tid=276&wid=0>.
- [2] L. Potter, J. Araullo, and L. Carter, "The Leap Motion controller: a view on sign language," *Proc. 25th Aust. Comput. Interact. Conf. Augment. Appl. Innov. Collab.*, pp. 175–178, 2013.
- [3] M. D. Wibowo, I. Nurtanio, and A. A. Ilham, "Indonesian sign language recognition using leap motion controller," *2017 Int. Conf. Inf. Commun. Technol. Syst.*, vol. 17, pp. 17–22, 2017.
- [4] L. Alexander, "Sign Language Recognition using Leap Motion," no. March, 2016.
- [5] P. Marin, G. ;Dominio, F.;Zanuttigh, "HAND GESTURE RECOGNITION WITH LEAP MOTION AND KINECT DEVICES Department of Information Engineering , University of Padova," *Image Process. (ICIP), 2014 IEEE Int. Conf.*, pp. 1565–1569, 2014.
- [6] P. Kumar, R. Saini, S. Kumar Behera, D. Prosad Dogra, and P. Pratim Roy, "Real-Time Recognition of Sign Language Gestures and Air-Writing using Leap Motion," vol. 1, pp. 1–4, 2017.
- [7] J. Shin and C. M. Kim, "Non-Touch Character Input System Based on Hand Tapping Gestures Using Kinect Sensor," *IEEE Access*, vol. 5, no. c, pp. 10496–10505, 2017.
- [8] A. Haghpanah, "A non-parametric mixture of Gaussian naive Bayes classifiers based on local independent features," no. 1, pp. 209–212, 2017.
- [9] M. Mohandes, S. Aliyu, and M. Deriche, "Arabic sign language recognition using the leap motion controller," *2014 IEEE 23rd Int. Symp. Ind. Electron.*, pp. 960–965, 2014.
- [10] N. Fitriyah, "Analisis dan simulasi sistem pengenalan wajah dengan metode fisherface berbasis outdoorvideo."
- [11] A. Z. Shukor, M. F. Miskon, M. H. Jamaluddin, F. Bin Ali Ibrahim, M. F. Asyraf, and M. B. Bin Bahar, "A New Data Glove Approach for Malaysian Sign Language Detection," *Procedia Comput. Sci.*, vol. 76, no. Iris, pp. 60–67, 2015.
- [12] Khamid, A. D. Wibawa, and S. Sumpeno, "Gesture Recognition for Indonesian Sign Language Systems (ISLS) Using Multimodal Sensor Leap Motion and Myo Armband Controllers Based-on Naïve Bayes Classifier," *2017 Int. Conf. Soft Comput. Intell. Syst. Inf. Technol.*, pp. 1–6, 2017.